

QUARRY MINING

& CONSTRUCTION EQUIPMENT PTY LTD

SPECIFICATIONS:

35 bar (525 psi)

AS 2660/B

Tube: Black conductive SBR/NR

Reinforcement: High tensile textile cords


Cover: Black conductive SBR – abrasion, ozone and fire resistant

Use: Air, water and stone dust delivery in underground mines

Safety factor: 2,5:1

Temperature: -30 °C +80 °C (-22 °F + 176 °F)

GROUT HOSE

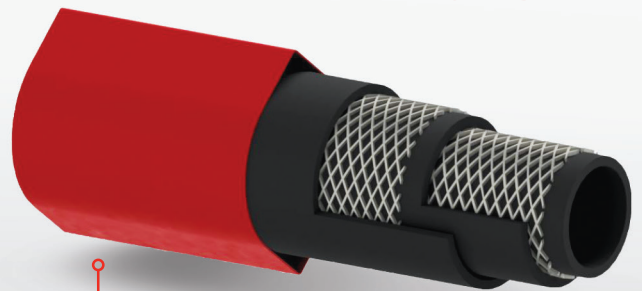

RED SHEATH FOR IDENTIFICATION

Internal Diameter		Outside Diameter		Maximum Working Pressure		Minimum Bend Radius		Vacuum	Weight	
mm	inch	mm	inch	bar	psi	mm	inch	%	kg/m	lb/ft
13	1/2	23	0,91	35	525	78	3,00		0,390	0,265
19	3/4	31	1,22	35	525	114	4,50		0,520	0,350
25	1	37	1,46	35	525	150	6,00		0,660	0,445



WWW.QUARRYMINING.COM

EXPERTISE YOU CAN DEPEND ON

NSW: 9/14 Yangan Drive, Beresfield NSW 2322 ph: +61 (0)2 4966 5028 fax: +61 (0)2 4910 9022 e: orders@quarrymining.com
 QLD: 5/35 Iridium Drive, Paget QLD 4740 ph: +61 (0)7 4998 5295 fax: +61 (0)7 4805 6126 e: ordersqld@quarrymining.com